




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B29C 39/00, C08L 41/00, 43/00		A1	(11) International Publication Number: WO 96/25278
		(43) International Publication Date: 22 August 1996 (22.08.96)	
(21) International Application Number: PCT/US96/01866		(81) Designated States: AL, AM, AU, AZ, BB, BG, BR, CA, CN, CZ, EE, FI, GE, HU, IS, JP, KG, KP, KR, LK, LR, LS, LT, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, RO, SD, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 12 February 1996 (12.02.96)			
(30) Priority Data:			
08/389,571	14 February 1995 (14.02.95)	US	
08/388,030	14 February 1995 (14.02.95)	US	
08/485,947	7 June 1995 (07.06.95)	US	
08/485,948	7 June 1995 (07.06.95)	US	
08/485,710	7 June 1995 (07.06.95)	US	
(71) Applicant: AVERY DENNISON CORPORATION [US/US]; 150 N. Orange Grove Boulevard, Pasadena, CA 91109 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(72) Inventor: LEE, Ivan; 409 Genoa Street #9, Arcadia, CA 91006 (US).			
(74) Agent: GRINNELL, John, P.; Christie, Parker & Hale, L.L.P., P.O. Box 7068, Pasadena, CA 91109-7068 (US).			

(54) Title: ACRYLIC EMULSION COATINGS FOR RUBBER ARTICLES

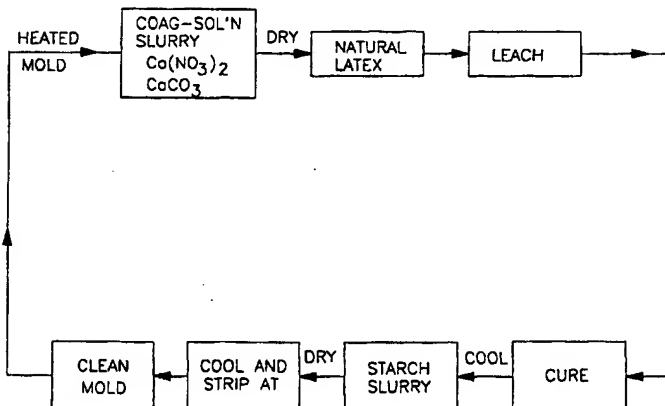

## (57) Abstract

There are provided powder-free polymer coated rubber articles, particularly rubber gloves, coated with a non-tacky acrylic based emulsion copolymer formed by polymerization of at least one low surface energy monomer, at least one alkyl acrylate and at least one hard monomer. The copolymers are preferably formed by sequential polymerization. This provides improved properties versus the conventional manner for manufacturing rubber gloves involving dipping a mold in the shape of the article to be formed into a coagulant slurry containing calcium nitrate and calcium carbonate.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

1

## ACRYLIC EMULSION COATINGS FOR RUBBER ARTICLES

### Field of the Invention

5 The invention relates to thin walled articles formed of natural or synthetic rubber having thereon a powder-free polymeric coating which enables or enhances mold or substrate stripping and donning.

### Background of the Invention

10 Rubber articles made from natural or synthetic rubber include surgeons gloves, physicians examining gloves, workers gloves, prophylactics, catheters, balloons, tubing, sheeting and the like. Some of such articles and in particular gloves require the ability of donning i.e. the ability of the rubber article to be slid on and off skin (tissue) surfaces without undue clinging or friction. Surgeons gloves require the wet donning, i.e., the ability  
15 to be slid over wet skin surfaces while physicians examining and workers gloves require the ability to be slid over dry skin surfaces. Other rubber articles like catheters and tubing, require some means to isolate the rubber from body fluids and tissue.

While this invention pertains to polymeric coatings for all rubber articles, it will focus on gloves which are the most complex of rubber articles in terms of use and manufacture.

20 To achieve acceptable donning properties, the rubber surface of a glove which comes in contact with skin or tissue has to be modified to reduce friction.

Surgeons gloves, as of today, require the donning surface to be sufficiently hydrophilic in order to absorb moisture that may be present on the surface of skin or tissue when the article is donned. Hydrogel coatings as described for instance in U.S. Patent 3,813,695,  
25 incorporated herein by reference, have been employed to achieve this property.

Examination and other gloves, by contrast, do not have a hydrophilicity requirement but still require the ability of the rubber article to be slid over skin (tissue) surfaces with minimal drag or friction.

Traditionally, this had been achieved by applying talc or other powdered materials,  
30 such as modified corn starch, over the skin or tissue contacting surface. Talc can no longer be used and other powders can contaminate the field of work. The same applies for gloves used by workers in dust-free environments such as the manufacture of computer chips and other electronic articles.

With reference to FIG. 1, the conventional way of manufacturing rubber gloves has  
35 been to dip a mold in the shape of the article to be formed in a coagulant slurry containing calcium nitrate and calcium carbonate. After drying, the mold is immersed in a rubber emulsion (latex) for a time sufficient for the rubber to coagulate and form a coating of desired thickness. The formed coagulated rubber article is oven cured, cooled, then dipped into a starch slurry. The starch coated surface is dried to provide a powder coat. After

1 cooling, the rubber article is stripped from the mold. This turns the glove inside out. The mold is cleaned and recycled.

Water leaching may and usually is employed as part of the procedure to remove rubber impurities.

5 The methods and materials of glove manufacture are also described, for instance, in U.S. Patents 3,411,982 and 3,286,011 to Kavalier et al., both incorporated herein by reference, "Polyurethane Latexes for Coagulation Dipping," Sadowski et al., Elastomerics, August 1979, pp. 17-20, incorporated herein by reference, and "Dipping with Natural Rubber Latex," Pendle et al., Natural Rubber Technical Bulletin, also incorporated herein  
10 by reference.

Halogenation, e.g. chlorination, and other chemical surface treatments have been used to eliminate the need for a powder coat on the final product to enable dry donning. While effective, this step is expensive and has the shortcoming of reducing shelf life of the rubber article. It would be desirable to provide a rubber article with a powder-free donning surface  
15 without resorting to the expensive and article deteriorating practices now in vogue. This could substantially reduce the cost of manufacture and maximize the shelf life of the rubber article.

U.S. Patent 4,302,852 to Joung, incorporated herein by reference, proposed to covalently bond an RTV silicone coating to the interior surface of a rubber surgeons glove after formation of the glove. This is stated to reduce but not eliminate the need for a  
20 donning powder.

U.S. Patent 4,304,008 also to Joung and incorporated herein by reference, applies a covalently bonded silicone or urethane to the outer surface of the glove and halogenates the inner surface. The halogenated inner surface eliminates the need for a donning powder.

25 U.S. Patent 4,310,928, also to Joung and incorporated herein by reference, teaches the deposition of a lipo compound (lipid or lipophilic substances) in place of a powder of mineral origin in combination with a surfactant in a coagulant solution to form a uniform film on a glove mold onto which the rubber is coagulated. The lipo compound and surfactant enable stripping of a formed glove from its mold.

30 These and other proposals have not achieved commercial acceptance.

#### Summary of the Invention

According to the present invention there are provided acrylic-based copolymers which coat and firmly adhere to and may, in part, be absorbed on the surface of a rubber article undergoing formation thereon by coagulation. The copolymers may also be deposited on  
35 a preformed rubber article. The copolymers, as to gloves and other rubber articles, are effective to induce the properties of mold stripping to the formed rubber article and donning without the need for further chemical treatment. Dry or wet donning and mold stripping properties may be achieved by depositing the same or a different acrylic based copolymer on opposed surfaces of the formed rubber article, e.g., gloves.

1 The acrylic based copolymers are preferably emulsion based copolymers of at least one  
reactive low surface energy monomer, preferably a silicone oligomer, at least one alkyl  
acrylate and at least one reactive hard monomer, the total of hard monomers being present  
in an amount sufficient to form a non-tacky copolymer directly or by blending of  
5 copolymers. Preferably the copolymers exhibited at least one dominant glass transition  
temperature ( $T_g$ ) peak above  $0^{\circ}\text{C}$  and typically at least one dominant glass transition  
temperature peak below about  $0^{\circ}\text{C}$ . One effective glass transition temperature is generally  
above about  $15^{\circ}\text{C}$ , preferably from about 15 to about  $60^{\circ}\text{C}$ . It is presently preferred that  
at least the donning surface be formed by sequential polymerization of two monomer  
10 systems; one providing the dominant low glass transition temperature peak, the other  
providing the dominant high glass transition temperature peak.

The presently preferred copolymers for release from a mold are copolymers  
comprising copolymerizable silicone oligomers, butyl acrylate, methyl acrylate, methacrylic  
acid, acrylic acid and styrene.

15 The presently preferred copolymers for dry and wet donning are copolymers  
comprising a silicone oligomer, styrene, butyl acrylate, methyl acrylate, acrylic acid,  
trimethylpropanetriacrylate and n-isobutoxymethyl acrylamide.

The emulsion copolymers are, for efficiency of the emulsion polymerization process,  
produced as high solids content emulsions. High solids are not required for product coating.  
Accordingly, the emulsions may be diluted to form a solids suspension containing from about  
20 3 to about 10% by weight preferably about 6% by weight total of the acrylic based emulsion  
copolymer of a solids content typically employed for mold coating and for depositing a  
coating on the surface of a formed rubber article. In the alternative the acrylic based  
emulsion copolymer can be recovered from emulsion and later resuspended.

25 The suspension is used in combination with a water soluble multivalent metal salt  
which serves as a coagulant for the rubber emulsion. The coagulant may be deposited on  
the acrylic based copolymer or deposited therewith from suspension. The object is to  
provide a surface concentration of coagulant salt which will enable coagulation of the latex  
onto the deposited copolymer coat in a commercially acceptable time. The preferred  
30 coagulant salt is calcium nitrate and is used in a concentration up to about 40, preferably  
from about 20 to about 40 percent by weight of the suspension.

In article manufacture, in particular glove manufacture, the mold having a coagulant  
and polymer coated surface is immersed into a rubber emulsion or latex from which the  
rubber deposits and coagulates on the surface of the copolymer forming a coated interior  
35 glove surface. The formed rubber article is dried, cured, then immersed into an aqueous  
suspension of the same or a different acrylic based copolymer which exhibits good donning  
characteristics. Dipping forms a donning polymer coat on the exterior of the rubber glove.  
The formed coated glove is then stripped from the mold. This reverses the glove placing the  
donning coat on the interior of the glove. As is known, water leaching may be effectively  
employed for rubber purification.

1 In the practice of the invention the preferred mold is a contoured mold. While molds having a textured to highly polished ceramic or porcelain surface and molds having a fluorocarbon coating may be employed, it is preferred to employ a mold which is sufficiently textured to produce a dull finish in the deposited laminate formed by depositing the rubber  
5 from the latex onto the copolymer coating. This is achieved by roughening the mold surface by blasting with sand or glass beads. The surfaces used have been measured to have a roughness of from about 8 to 10 microns peak to valley.

It is preferred to use the same copolymer for the donning and release surfaces of the gloves with the donning side containing corn starch and a small amount of oil, i.e., about  
10 0.1% by weight of solids.

The preferred copolymers have a surface friction which requires an average force of about 0.05 lb to less than about 0.3 lb, preferably about 0.2 to about 0.25 lb to move a sled weighing 200 g over the copolymer coated surface of the rubber article.

#### Brief Description of the Drawings

15 FIG. 1 is a flow diagram of the current method of rubber glove manufacture;

FIG. 2 is a Differential Scanning Calorimetry (DSC) plot of derivative of heat flow vs. temperature showing glass transition temperature peaks for the preferred mold release copolymer coating of the invention; and

20 FIG. 3 is a Differential Scanning Calorimetry plot of derivative of heat flow as function of temperature showing glass transition temperature peaks for the preferred donning copolymers of the invention.

#### Detailed Description

According to the present invention, there are provided non-tacky, acrylic based copolymers which adhere aggressively to the surface of rubber and other articles to provide  
25 flexible copolymeric coatings which can be stretched without separation from a rubber surface to which they are bonded. The copolymers are formed of at least one reactive low surface energy monomer, preferably one or more copolymerizable silicone oligomers, at least one alkyl acrylate and at least one hard monomer. The copolymers provide powder-free coated rubber products which exhibit excellent mold stripping and dry donning and provide  
30 protective coatings for other articles.

By the term "rubber article" as used herein, there is meant articles formed from natural and/or synthetic rubbers. They are typically deposited by coagulation from a latex onto a multivalent metal salt.

35 By the term "copolymerizable low surface energy monomer" there is meant monomers which if homopolymerized would require only a low level of force to release the homopolymer from a surface to which it was applied. In copolymers the copolymerizable low surface energy monomers reduce the energy to release the copolymers from a surface whether a mold, tissue or skin.

Exemplary of copolymerizable low surface energy monomers there may be mentioned reactive silicones, fluorocarbons, and fatty acid esters and the like, the low surface energy

1 monomers having vinyl, acrylic and/or methacrylic functionalities. Preferred are copolymerizable silicone oligomers.

By the term "copolymerizable silicone oligomer," as used herein, there is meant polymeric siloxanes and silicones which have acrylate, methacrylate or vinyl functionality, including but not limited to acrylated polysiloxanes. Acrylate, methacrylate or vinyl functionality is at least 1, preferably from 2 to about 3.

Exemplary of the copolymerizable silicone oligomers there may be mentioned the Tegro® Silicone acrylates RC 149, 300, 450, 710, 720 and 802 and ZMR1395 manufactured and sold by Goldschmidt Chemical Corporation of Hopewell, Virginia, which polymers are linear dimethylpolysiloxanes with multiacrylate functionality and a molecular weight between about 1,000 and 20,000 g/mol. They include the reaction product of dimethylpolysiloxanes with pentaerythritoltriacylate. There may also be mentioned silicone systems such as GE 6000, a vinyl polydimethyl siloxane and 6010 catalyst concentrate manufactured and sold by GE Silicones division of General Electric Company. Ethoxy-substituted polysiloxanes may also be used.

The copolymerizable low surface energy monomer(s) and preferably the copolymerizable silicone oligomer are employed in a concentration of from about 0.7 to about 20%, preferably about 1 to about 15% by weight of the monomers forming the acrylic based copolymer. They function to enable dry and wet donning and facilitate mold release.

The balance of the monomers are selected to provide good bonding to a latex surface, donning (wet and dry), a good tactile feel, mold release and a non-tacky copolymer having a significant glass transition temperature (T<sub>g</sub>) of at least about 15°C, preferably from about 15 to about 60°C. The monomers are also selected to provide sufficient elongation so that the acrylic based copolymer coating will stretch or elongate with the rubber with minimal cracking, flaking or debonding. Suitable copolymers have an elongation of 100 to 500% or more, typically from about 100 to about 300% when self bonded to a rubber surface.

Of the rubber articles which can be manufactured in accordance with the instant invention, the articles and surgeons which have the most critical requirements are examination and surgeons gloves. Because of their complex shape, they must be capable of being stripped from a mold using commercially acceptable practices and yet provide, a surface, which when stripped from the mold, has good tactile feel; that is, the ability of a person to pick up articles with a good grip. In this regard, good tactile feel is contra to good mold stripping.

The opposed surface of the glove must enable good (dry or wet) donning, that is the ability to be stretched and slid over the surface of skin without excessive resistance.

The tactile and mold release surface may be glassy and smooth but is preferably rough and dull as induced by a textured or roughened mold. The donning surface normally requires a more course or irregular (dull) surface.

In respect of glove manufacture, copolymers of the instant invention provide good mold stripping and/or donning properties.

1 In addition to the low surface energy monomers, the following monomers and combination thereof can be used in accordance to the invention to provide suitable polymers having good donning and/or stripping characteristics.

5 One class of the monomers used in forming the copolymers are alkyl acrylate monomers containing from 1 to about 10 carbon atoms in the alkyl group, present in a total amount of from about 30 to about 85% by weight of the monomers, preferably from about 40 to about 85% by weight of the monomers forming the acrylic based copolymers. The alkyl acrylate monomers that may be used include methyl acrylate, ethyl acrylate, butyl acrylate, propyl acrylate, 2-ethylhexyl acrylate, isooctyl acrylate, isodecyl acrylate, and the like. The presently preferred alkyl acrylate monomers are butyl acrylate and methyl acrylate.

10 The balance of the monomer system is comprised of hard monomers. As used herein, "hard monomers" are monomers which, if homopolymerized, would have glass transition temperature (T<sub>g</sub>) greater than about 25°C. Hard monomer content is from about 20 to about 60% by weight of the monomers forming the acrylic based copolymer.

15 Among such monomers there may be mentioned styrenic monomers such as styrene, alpha methyl styrene and the like; alkyl methacrylates such as methyl methacrylate, ethyl methacrylate, butyl methacrylate and the like; and amides such as an n-isobutoxymethyl acrylamide and the like.

20 There may be present and preferably are present one or more unsaturated carboxylic acids containing from 3 to about 5 carbon atoms, such as acrylic acid, methacrylic acid, itaconic acid and the like. They serve to improve cohesive strength and promote adhesion to rubber and other surfaces and are present in a concentration of from about 1 to about 6% by weight preferably from about 2 to about 6% by weight of the emulsion copolymer.

25 Other vinyl unsaturated monomers which aggressively copolymerize with the principal monomers of the invention and do not create a residual monomer contamination problem may also be used to modify polymer properties.

Such monomers include one or more vinyl esters containing from 2 to about 16 carbon atoms in the alkyl group of the acid. Representative vinyl esters include vinyl acetate, vinyl butyrate, vinyl propionate, vinyl isobutyrate, vinyl valerate, vinyl versitate, and the like.

30 Other useful monomers there may be mentioned diesters of dicarboxylic acids and mixtures thereof, in which each ester group of the diester independently contains from about 8 to about 16, preferably from about 8 to about 12, carbon atoms. The preferred diesters are di-2-ethylhexyl maleate (dioctyl maleate), di-2-ethylhexyl fumarate and mixtures thereof.

35 The emulsion copolymers may be prepared in accordance with the present invention by polymerizing the monomers to yield a polymer having a suitable average or net glass transition temperature (T<sub>g</sub>) above about 15°C, preferably from about 15°C to about 60°C, and a solids content ranging from about 40 to about 70% by weight of the emulsion. Catalysts, such as potassium persulfate, tertiary butyl hydroperoxide and the like, and Redox catalysts such as sodium meta-bisulfite and the like, present in an amount of from about 0.15 to about 0.5 part by weight per 100 parts weight monomers with surfactant levels ranging



1 from about 0.5 to about 5% by weight based on weight of the monomers being preferred.  
Reaction temperature generally ranges from about 65 to about 85°C.

There may be included "chain transfer agents" by which there is meant organic  
compounds containing mono- or multi-mercaptan groups, chlorinated groups, hydroxy  
5 groups, and the like, as are known in the art. The presently preferred chain transfer agents  
are n-dodecyl mercaptan and t-dodecyl mercaptan provided in a concentration from about  
0.01 to about 0.1% by weight of the monomers. In addition, internal cross linking may be  
induced by the use of multifunctional acrylates and methacrylates.

While the copolymers prepared in accordance with the instant invention can be used  
10 for a variety of rubber article applications, including gloves, catheters, tubing, protective  
coverings, prophylactics, and the like, the primary focus is their use in the manufacture of  
powder-free gloves and other articles.

With reference again to FIG. 1, a mold in a contoured shape of a glove is coated with  
an acrylic based copolymer of this invention which exhibits good mold stripping properties.  
15 The copolymer coating is preferably applied from suspension in combination with a  
coagulating electrolyte. The steps of copolymer coating onto a mold for transfer to a latex  
rubber replaces the step of depositing a slurry of calcium carbonate on the mold surface  
while depositing the copolymer on a formed article replaces coating the article with a starch  
slurry. The copolymer is applied from suspension. The article is formed by deposition onto  
20 a coagulating salt such as calcium nitrate provided on a mold, on a copolymer coating on the  
mold or codeposited with the copolymer. For gloves, the copolymer coated mold providing  
a coagulant salt surface, preferably codeposited with the copolymer, is emersed into a rubber  
latex which coagulates onto the surface of the mold providing shape to the rubber article,  
dried, cured and then immersed into a second suspension of the same or another acrylic  
25 based copolymer which exhibits excellent donning properties i.e. the ability to be slid over  
a skin surface with minimal friction and blocking. Leaching is employed as in the prior art  
either before or after cure or prior to after providing a donning coat. The formed article is  
then stripped from the mold. The mold is cleaned and recycled. Stripping turns the glove  
inside out causing the donning surface to be on the inside of the glove and the mold stripping  
30 surface to be outside of the glove.

For glove manufacture, it is presently preferred to use a roughened mold as formed  
by blasting with sand or glass beads to provide a roughened surface which as been measured  
as having a roughness of about 8 to 10 microns peak to valley. Other textures may also be  
used.

35 The emulsion copolymers of the instant invention may be used as such or combined  
with inert granular solids such as calcium carbonate, starch and the like provided to enhance  
donning. Inert solids content may range in an amount based on total solids weight of from  
about 3 to about 10% by weight of solids. It is presently preferred to employ corn starch  
in an amount of from about 0.3 to about 0.7, more preferably from about 0.3 to about 0.5  
part per part by weight copolymer. A suitable corn starch is 400 L-NF corn starch made by

1 Roquette America, Inc., Keokuk, Iowa. The donning coat also preferably contains a small amount, about 0.1% by weight copolymer, of an oil such as octyl isononanoate or Neobee M-20, a polyol diester of a short cleaned fatty acid manufactured by Stepan Chemical Co., Northfield, Illinois.

5 It has been found that for good donning and stripping properties, each of the copolymer coatings are preferably formed of at least two polymers. One is a copolymer having a low glass transition temperature, and the other a copolymer having a high glass transition temperature. The two, in combination, provide a non-tacky copolymer having at least one significant glass transition temperature of about 15°C or more and preferably in a range of about 15 to about 60°C.

10 While this may be achieved by using a blend of polymers, it is preferably achieved by sequential or "core and shell" polymerization of at least two monomer systems, the first forming an acrylic based copolymer having a glass transition temperature of less than about 25°C, typically from about -50 to about 25°C; the other forming an acrylic based copolymer having a glass transition temperature of from about 25 to about 100°C, the first and second monomer systems providing no tacky copolymer coating systems. It has been observed that for a copolymer exhibiting good mold release, the copolymer having glass transition temperatures below 0°C occupies the bulk of the total glass transition temperatures. The opposite may be true for a donning copolymer.

15 In particular, FIG. 2 is a plot of glass transition temperature of a sequential polymerized mixture of copolymers with a major glass transition temperature peak below 0°C and a minor glass transition temperature peak above 0°C for use as a mold release copolymer coating. While, not bound by theory in this "core and shell" approach to sequential polymerization of two monomer systems, it is believed there is formed a continuous phase of the low glass transition temperature copolymer having dispersed therein or thereon, the high glass transition temperature copolymer.

20 FIG. 3 is a glass transition temperature plot for a good donning copolymer coating where relative peak intensities of glass transition temperature are reversed.

25 For good mold release characteristics, it is presently preferred that weight ratio of the soft or low glass transition temperature copolymer to high glass transition temperature copolymer be in the range of about 1:1, to about 1:3, preferably about 1 to 1.5.

For good donning characteristics, the weight ratio of low to high glass transition temperature copolymers is in the range of about 3:1, to about 1:1, preferably about 1.2 to 1.

30 It has been observed that if too much high Tg copolymer is present, flaking will occur. In addition, for good dry donning, it is desirable that the copolymer form as domains or microparticles. This provides in essence, a rough surface which is desirable for good donning and fillers such as calcium chloride may be included in the suspension. If too much low glass transition temperature copolymer is employed, there is a problem of sticking or blocking.


1 As indicated above, for the process of copolymer manufacture it is desirable to employ  
a surfactant system present in the amount of from about 0.5 to about 5 parts by weight to 100  
parts by weight monomers, preferably about 3 parts per 100 parts by weight monomers. It  
is also desirable that the suspension formed from the emulsion copolymer tolerate electrolytes  
5 typically employed for latex coagulation in concentration typically used for latex coagulation,  
i.e., in the range of about 3 to about 10% by weight of suspension. The presently preferred  
surfactant system is a combination of anionic surfactants. One of the anionic surfactants has  
a molecular formula  $C_{20}H_{37}O_7NaS$  and containing 20 mols of ethylene oxide and is used in  
admixture with anionic surfactants which are salts of sulfated nonyl phenoxypoly  
10 (ethyleneoxy) ethanol and sodium lauryl ether sulfate. The presently preferred surfactant  
system is one employing 37.4% by weight of the ammonia salt of sulfated nonylphenoxypoly  
(ethyleneoxy) ethanol, 21.8% by weight of sodium dioctyl sulfosuccinate and 40.8% by  
weight sodium lauryl ether sulfate. The combination of anionic surfactants enables the  
formation of a stable suspension of the acrylic based emulsion copolymers of the invention.

15 The emulsion copolymers of the instant invention can be prepared to provide both a  
high cohesive strength and holding power to natural and synthetic rubber surfaces as well as  
the ability to stretch with the rubber surfaces and enable donning. The copolymers have an  
elongation of 100 to 500%, preferably 100 to 300% when adhered to rubber and a mean  
coefficient of friction from about 0.05 to about 0.3 lb typically from about 0.2 to about 0.25  
20 lb. Copolymer coating thickness is from about 10 to about 25 microns, preferably from  
about 12 to 16 microns.


The inclusion of multifunctional monomers such as tetramethylpropane triacrylate and  
the like, which undergo cross linking reactions and chain transfer agents as part of the  
monomer system results in formation of internally cross-linked emulsion polymers. This  
25 differs from externally cross-linked polymer in that the functional groups, such as carboxyl,  
hydroxyl, and/or amino groups, remain free and available for improving bonding and are  
available for external cross-linking reactions such as by exposure to actinic, electron beam  
radiation and/or through external cross-linking agents.

The emulsion polymers can be used as such or modified by the addition of  
30 vinyl-addition silicone polymers present in an amount up to about 30% by weight based on  
the weight of the emulsion polymer and vinyl-addition silicone system. The vinyl-addition  
silicone systems used are those which comprise silicone monomers having vinyl unsaturation  
which, when mixed with silicone hydride containing crosslinkers, is cured by a Group VIII  
metal catalyst, preferably a platinum catalyst.

35 The presently preferred vinyl-addition silicone emulsions are mixtures of reactive vinyl  
silicone polymers of the formulas:



where m and n are independent integers, and silicone hydride crosslinking polymers of the formula;



where m and p are independent integers.

15 There may also be included conventional ingredients designed to modify mold release properties.

Vinyl-addition silicone systems react by thermally induced addition-cure (hydrosilation) between polydimethyl-hydrogen siloxane crosslinkers and reactive vinyl-functional silicone polymers to furnish a cured polymer.

20 The vinyl-functional silicone polymers are polydimethyl siloxanes, where some of the methyl groups have been substituted with vinyl groups or groups containing vinyl unsaturation, i.e., the reaction takes place between vinyl substituted polydimethyl siloxane and polydimethylhydrogen siloxane.

25 The whole hydrosilation is catalyzed by silicone soluble complex compounds of Group VIII transition metals, particularly platinum. In normal use of vinyl-addition silicone systems, a small amount of inhibitor is added to prevent premature reaction between the silicone hydride and vinyl silicone groups following mixing of the coating components, before deposition onto the substrate. This inhibitor is removed or made ineffectual during the thermal curing process. Suitable silicone emulsion systems for practice of this invention can be obtained from Dow Corning, Rhone-Poulenc and Wacker-Chemic GmbH, e.g., the

30 Wacker VP 1571E/1572 System.

Emulsion copolymers of the instant invention are formed to high solids content during emulsion polymerization for efficiency of the emulsion polymerization process. They are normally diluted to form a suspension having a less solids content for use coating onto a mold for the rubber article to be formed or onto the formed rubber article. As is known in the art typical solids content is in the range of about 3 to about 10% by weight of suspension.

35

A coagulant salt is required to cause the rubber to deposit from its emulsion (latex) onto a surface of the polymer. The coagulant may be applied after drying of the copolymer on the surface of the mold, a considerable savings in time and cost can be realized by combining a coagulant with the copolymer suspension. It has surprisingly been found that the copolymer suspensions of the instant invention can tolerate the high amount of polyvalent

metal salts which serve as a coagulant if the multi-component anionic surfactant system is employed. Examples of coagulants that can be used are water soluble salts of calcium, zinc, aluminum and the like. Calcium nitrate is presently preferred. A coagulant salts, preferably calcium nitrate, is normally provided in a concentration of up to about 40% by weight of the suspension typically from about 20 to about 40% by weight of suspension for mold coating. Combining the coagulant with the emulsion polymers of the instant invention eliminates a significant step in the production of copolymer coated rubber articles. If the copolymer is applied without coagulant, then the coagulant is applied to the surface of the copolymer after the copolymer has been deposited and dried on the surface of the mold. This adds a step and is, therefore, a more expensive measure.

The presently preferred molds are smooth contoured molds having a textured, or smooth ceramic, porcelain or a fluorocarbon surface which will accept the coating of the copolymer or the copolymer and coagulant and release the formed rubber article at the completion of the process.

The amount of time of immersion in the rubber emulsion determines the thickness of the formed rubber coat. A typical thickness is from about 6 to about 10 mils.

After removal, the coagulated rubber articles may be allowed to stand or heat dried in an oven. The formed rubber article is then leached in water. The leached rubber coating is then cured.

After cure, the rubber coated copolymer is allowed to cool to about 60 to 80°C and then dipped into a second acrylic based emulsion copolymer suspension preferably free of coagulant to avoid the waste of salt by need for another leaching step. Immersion is for about 3 to about 6 seconds. The coating is dried at about 100 to 125°C for about 2 to 3 minutes.

The double coated article is then cooled to about 40°C and stripped from the mold. Because stripping turns the glove inside out, the second coating becomes the donning coating for contact with tissue or skin while the exterior or outside coating which was the stripping coating becomes the tactile coating.

While the focus of the discussion has been directed to copolymer coatings for rubber articles and in particular gloves, the copolymers have been found to have other utilities, and in particular, coatings for what is known as "soft touch" products for use in the automobile industry. An example is to provide polymeric laminates having a leather look with a feel to match.

The copolymers of the instant invention have been successfully evaluated for use in vacuum formable laminates. The product construction would consist of a polyester film acting as a carrier which is removed prior to vacuum forming. The copolymers of the instant invention are deposited on the carrier at about 0.25 to about 2 mils in thickness to save as a clear or pigmented top coat and as the surface that is felt by the user. The balance consists of material deposited to give the appearance of leather, wood grain or the like, as the layer of the copolymer of the instant invention adds or insures the "soft touch". There is then

1 added a layer of heat activated adhesive followed by heat and pressure bonding to a 20 mil sheet of polymeric material compatible with the injection molding plastic. The polyester carrier is then removed and the laminate is vacuum formed and insert molded to give a contoured plastic part with a unique and desirable soft feel.

5 The copolymers of the instant invention could also be used as a spray coating or could be deposited on a backing having a pressure-sensitive adhesive on the opposite side. The copolymers provide protective and unusual "soft touch" performance properties. In either application, the polymer is believed to have unusual exterior performance properties due to containing silicone and acrylic monomers.

10 **EXAMPLE 1 - EMULSION COPOLYMER FOR MOLD STRIPPING.**

There was formed on a parts by weight basis a first soap solution of 98.2 parts by weight deionized water, 0.87 parts tetrasodium pyrophosphate 10.9 parts by weight Aerosol™ NPES 458, a 58% solution of the ammonium salt of sulfated nonylpoly (ethyleneoxy) ethanol manufactured by Cyanamid, 4.9 parts Aerosol™ OT 75, a 75% solution of sodium dioctyl sulfonate and 3 parts Disponil FE S77 a 32.5% solution of sodium lauryl ether sulfate manufactured by Henkel and, a second soap solution containing 82.2 parts deionized water, 0.73 parts tetrasodium pyrophosphate, 9.1 parts NPES 450, 4.1 parts OT 75 and 17.8 parts FES 77 surfactants.

20 There were formed two separate monomer systems. The first monomer system contained 39.6 parts styrene, 318 parts butyl acrylate, 50 parts methyl acrylate, 3.8 parts methacrylic acid, 3.8 parts acrylic acid, 71.3 parts RC 726, a silicone acrylate manufactured and sold by Goldschmidt, 30 parts GE silicone SL 6000-D1 and 23.5 parts GE silicone SL 6010-D1.

25 The second monomer system contained 210 parts styrene, and 102.9 parts butyl acrylate, 43.9 parts methyl acrylate, 3 parts methacrylic acid, 2.7 parts acrylic acid, and 56 parts GE silicone SL 6000-D1.

30 There was separately formed a catalyst solution containing 78 parts of deionized water and 2 parts potassium persulfate, and an activator solution containing 78.5 parts by weight deionized water and 1.5 parts of sodium metabisulfite. There was formed an initial reactor charge containing 320 parts deionized water, 0.08 parts of NPES 458, 4.5 parts of sodium bicarbonate and 3.85 parts potassium persulfate and 0.15 parts sodium meta-bisulfate. To the initial reactor charge there was slowly added, with agitation, the mixture of the first monomers in the first soap solution followed by incremental addition of the activator solution then incremental addition of the catalyst. Reactor temperature was maintained between 65 and 73°C. Following completion of the reaction there was added the second soap solution containing the second charge of monomers incrementally. After completion of reaction were treated with an ammonium and biocide, solutions water. The emulsion had a pH of 8.7 and a solids content of 57%.

35 **EXAMPLE 2 - EMULSION COPOLYMER FOR DRY DONNING.**

A procedure of Example 1 was substantially repeated except that the monomers for the first charge were in proportion of 95 parts styrene, 220.7 parts butyl acrylate, 38.8 parts

1 methyl acrylate, 9.8 parts acrylic acid, 15 parts GE SL 6000-D1, 9 parts trimethylpropane-triacrylate and 3.3 parts n-isobutoxymethylacrylamide.

For the second monomer charge, there was employed a monomer mix of 302.3 parts styrene, 146.2 parts butyl acrylate, 57.9 parts methyl acrylate, 17.5 parts acrylic acid, 40.4  
5 parts GE SL 6000-D1, 20 parts trimethylpropane triacrylate and 4.48 parts N-isobutoxymethyl acrylamide, the incremental catalyst solution contained 70.5 parts deionized water, and 2.5 parts of potassium persulfate. To the first soap solution contained 6.91 parts NPES 458, 3.3 parts OT 75 and 14.7 parts FES 77 and the first monomers were added a to the initial reactor charge followed by incremental addition of the catalyst solution  
10 and after completion of reaction, there was incrementally added second monomer system in a soap solution containing 4.9 parts OT-75, 10.29 parts NPES 458 and 21.89 parts FES 77. Temperature was maintained at 78 to 85°C and after treatment with the ammonium biocide solution, the emulsion had a pH of 6.6 and a total solid content of 57.6%.

### EXAMPLE 3 - GLOVE MANUFACTURE.

15 The copolymer of Example 1 and calcium nitrate as a coagulant were coated onto a mold for an examination glove. The coated mold was immersed into a latex solution and allowed to remain in the solution until a coat of 6 to 10 mils built up on the coating. The coating was then immersed in a solids suspension of the copolymer of Example 2. After drying the coating of the copolymer of Example 2, the glove was stripped from the mold.

20 The glove formed was fisheye free and had a shiny outside of post cure coating of the copolymer of Example 1 and a dull side of the coating of the copolymer of Example 2. The copolymers of Examples 1 and 2 were strongly bonded to the latex and the formed glove had excellent dry and wet donning properties for use as an examination glove. No flaking occurred when the glove was stretched. FIG. 3 shows the DSC profile for the copolymer  
25 with major glass transitive temperature peaks at -21.04°C, 11.74°C +12.45 and +28.55°C. Surface morphology revealed a slightly irregular continuous surface with microcraters and submicron protrusions, the microcrater diameters ranging from 0.1 to 1  $\mu$ . FIG. 4 shows the DSC plot for this polymer and the several glass transition peaks, the major ones being at -12.51°C, 13.57°C and 29.76°C. Morphology studies revealed a slightly irregular surface  
30 with submicron protrusions, shallow submicron craters and agglomerated particle protrusions and microcraters.

### EXAMPLE 4 - EMULSION COPOLYMER FOR DRY DONNING.

There was formed a surfactant solution comprising, on a parts by weight basis, 122.70 parts deionized water, 1.60 parts tetrasodium pyrophosphate (0.96 parts dry), 31.27 parts  
35 surfactant (21.56 parts dry).

There was separately formed a monomer mixture containing on a parts by weight base is 100 parts styrene, 405.12 parts butyl acrylate, 37.42 parts methyl acrylate, 6.5 parts methacrylic acid, 12.30 parts acrylic acid, 6.25 parts RC 705, a silicone acrylate sold by Goldschmidt and 0.08 parts n-dodecyl mercaptan. The monomer mixture was added to the surfactant solution in a weight ratio of 4 parts monomer to 1 part surfactant solution.

1           There was separately formed an incremental catalyst solution of 63 parts by weight deionized water and 2 parts by weight potassium persulfate as well as a minor amount of surfactant.

5           To a stirred, nitrogen blanketed reactor, following the charge of 200 parts by weight deionized water, 3.08 parts by weight surfactant and 1.5 parts potassium persulfate, there was incrementally added the monomers and surfactant solution with the catalyst solution at a rate to enable a reaction to be carried out with a slight exotherm. Temperature was kept at  $80 \pm 2^\circ\text{C}$ . There was formed an emulsion having a total solids content of about 54.3%. The emulsion was then adjusted to a pH of about 6.5 with a biocide/ammonia neutralizing solution.

10           **EXAMPLE 5 - EMULSION COPOLYMER FOR DRY DONNING.**

          Example 4 was substantially repeated except that the monomer mixture contained on a parts by weight based 219.2 parts methyl methacrylate, 219.2 parts butyl acrylate, 51.33 parts methacrylic acid, 13 parts n-isobutylmethacrylate, 16.66 parts silicone acrylate (RC 705), and 0.13 parts n-dodecyl mercaptan and the surfactant solution was formed of 27.73 parts Aerosol NPES 930, 2.7 parts OT-75 and 24.9 parts FES-77 and contained 0.66 parts sodium metabisulfite and 18.81 parts surfactant in 113.3 parts deionized water.

15           **EXAMPLE 6 - GLOVE MANUFACTURE.**

          The emulsion copolymer of Example 5 was evaluated as a 4.8% solids suspension contains 4.5% soap. It was used to coat a washed examination glove. The deposited coat gave very good dry donning and stripping characteristics. No flaking occurred.

20           **EXAMPLE 7 - DRY DONNING COPOLYMER AND GLOVE MANUFACTURE.**

          Following the procedure of Example 4, there was formed a copolymer containing 46.4% by weight styrene, 38% by weight butyl alkylate, 1.3% by weight methacrylic acid, 3.3% by weight acrylic acid, 8.5% by weight silicone acrylate, and 1.9% isobutoxymethyl acrylamide. The formed copolymer was combined with, by weight of the copolymer; of 0.6% vegetable oil and providing a good donning copolymer for glove manufacture.

25           **EXAMPLE 8 - DRY DONNING COPOLYMERS AND GLOVE MANUFACTURE.**

          There was formed a blend of copolymers in a weight ratio of 1:3 of the copolymer of Example 5 and a copolymer obtained by emulsion polymerization of 48.2% by weight styrene, 33.1% by weight butyl acrylate, 6.1% by weight methyl acrylate, 1.1% by weight methacrylic acid, 2.1% by weight acrylic acid, 6.3% by weight silicone acrylate, 0.9% by weight n-isobutoxymethyl acrylamide and 2.3% by weight trimethylpropane triacrylate. The blend of polymers was deposited onto a mold. Calcium nitrate was the coagulant. The procedure of Example 3 was used to form a coating of the latex on the copolymer.

30           **EXAMPLE 9 - DRY DONNING COPOLYMER AND GLOVE MANUFACTURE.**

          There was formed an emulsion copolymer from a monomer mix containing 43% by weight styrene, 36.5% by weight butyl acrylate, 8.6% by weight methyl acrylate, 1% by weight methacrylic acid, 1.9% by weight acrylic acid, 5.2% by weight silicone acrylate, 0.8% by weight n-isobutoxymethyl acrylamide and 3% by weight trimethylpropane



1 triacrylate. A suspension of the copolymer which was coated onto medium and large glove molds, onto which there was formed using the procedure of Example 3, a rubber coat.

#### **EXAMPLE 10 - FRICTIONAL MEASUREMENTS.**

5 For purposes of determining surface friction of the copolymer coating, there were prepared samples 1" wide, over which there was drawn at a crosshead speed of 15 inches per minute a 200 g sled containing three glass balls having a diameter of 5/8" positioned at the corners of an equilateral triangle. A force of about 0.112 lb. of resistance was required to draw of the sled over a powdered surface. The force was 0.07 lb for a chlorinated surface and a biogel surface. By contrast, untreated surfaces gave a resistance of about 0.33 and  
10 0.34 lb with a tendency to lift from the surface onto which they were applied with a considerable tendency toward jerky movement. The composition of Example 7 required a force of about 0.22 lb. The blend of polymers of Example 8 required a force of about 0.23 lb and the composition of Example 9, when deposited from a 6% solids suspension, required a force of about 0.22 lb. Resistance increased to about 0.225 lb. at an 8% solids  
15 concentration. Measurements were made under conditions of 50% humidity and a temperature of 23°C.

#### **EXAMPLE 11 - EMULSION COPOLYMER FOR PROTECTIVE COATING.**

A procedure of Example 1 was substantially repeated except that the monomers for the first charge were in proportion of 150 parts styrene, 237 parts butyl acrylate, 22 parts  
20 acrylic acid, 31 parts RC 726, 9 parts methacrylic acid triacrylate and 8.7 parts N-isobutoxymethylacrylamide.

For the second monomer charge, there was employed a monomer mix of 348 parts styrene, 136.6 parts butyl acrylate, 9 parts methylacrylic acid, 248 parts acrylic acid, 30.8  
25 parts RC 726, 8.7 parts N-isobutoxymethyl acrylamide, the incremental catalyst solution contained 70.5 parts deionized water, and 2.5 parts of potassium persulfate. There was formed by sequential emulsion polymerization emulsion of the copolymers which a total solid content of 53.3. The formed copolymers provided aggressive protective coatings for rubber surfaces.

#### **EXAMPLE 12 - DONNING COATING**

30 The aqueous solution of the emulsion copolymer of Example 1 was combined with calcium carbonate present in an amount of about 3.3% by weight of the emulsion as formed which there was added water and a minor amount of propylene glycol dicaprylate. The mixture formed an excellent composition for providing a wet and dry donning surface in a glove.

#### **EXAMPLE 13**

35 Example 12 was repeated except that starch was substituted for calcium carbonate. Again the coating had excellent dry and wet donning properties.

1     **WHAT IS CLAIMED IS:**

- 2     1. A composition providing a polymer coating on the surface of articles which  
comprises an aqueous suspension of a non-tacky acrylic based emulsion copolymer which  
copolymer is comprised of the reaction product of from about 0.7 to about 20% by weight  
5     of at least one copolymerizable low surface energy monomer, from about 30 to about 85%  
by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the  
alkyl group, the balance of the monomers comprising hard monomers, said hard monomers,  
when homopolymerized having a glass transition temperature greater than about 25°C, and  
present in an amount sufficient to form said non-tacky acrylic based emulsion copolymer.
- 10    2. A composition as claimed in claim 1 in which the copolymerizable low surface  
energy monomer is a copolymerizable silicone oligomer.
3. A composition as claimed in claim 1 or 2 in which the copolymerizable low  
surface energy monomer is present in an amount of from about 1 to about 15% by weight  
of the acrylic based copolymer.
- 15    4. A composition as claimed in claim 1, 2 or 3 in which the alkyl acrylate is  
selected from the group consisting of methyl acrylate, butyl acrylate, and mixtures thereof.
5. A composition as claimed in any one of claims 1 to 4 in which the hard  
monomer comprise monomers selected from the group consisting of styrenic monomers, alkyl  
methacrylates, unsaturated carboxylic acids containing from 3 to about 5 carbon atoms,  
20    amides and mixtures thereof.
6. A composition as claimed in any of claims 1 to 5 which comprises an aqueous  
suspension of a non-tacky acrylic based emulsion copolymer comprised from about 0.7 to  
about 20% by weight of at least one copolymerizable silicone oligomer, from about 40 to  
about 80% by weight of an alkyl acrylate selected from the group consisting of methyl  
25    acrylate, butyl acrylate, and mixtures thereof, the balance of the monomers selected from the  
group consisting of styrene, methacrylic acid, acrylic acid, methyl methacrylate,  
isobutoxymethacrylamide, isobutylmethacrylate, and mixtures thereof.
7. A composition as claimed in any one of claims 1 to 6 and in which the  
suspension contains at least two anionic surfactants.
- 30    8. A composition as claimed in claim 7 in which the anionic surfactants are  
selected from the group consisting of the sodium dioctyl sulfosuccinate, the ammonium salt  
of sulfonated nonylphenoxypoly (ethyleneoxy) ethanol and a fatty alcohol polyglycol ether  
sulfate.
9. A composition as claimed in any one of the previous claims which comprises  
35    a mixture of emulsion copolymers comprised of a first acrylic based emulsion copolymer and  
a second acrylic based emulsion copolymer, said first and second copolymers formed by  
emulsion polymerization of monomers comprised of from about 0.7 to about 20% by weight  
of at least one copolymerizable low surface energy monomer, from about 30 to about 85%  
by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the

1 alkyl group, the balance of the monomers comprising hard monomers, which when  
homopolymerized, have a glass transition temperature greater than 25°C and provided in an  
amount sufficient to form a mixture of first and second acrylic based emulsion copolymers  
which are non-tacky, said first acrylic based emulsion copolymer having a glass transition  
5 temperature from about -50°C to about 25°C, said second acrylic based emulsion copolymer  
having a glass transition temperature from about 25°C to about 100°C.

10. A composition as claimed in claim 9 in which the low surface energy monomer  
is a copolymerizable silicone oligomer.

11. A composition as claimed in claim 10 or 11 in which the weight ratio of the  
10 first acrylic based emulsion copolymer to the second acrylic based emulsion copolymer is in  
the range of about 1:1 to about 1:3.

12. A composition as claimed in claim 10 or 11 in which the weight ratio of the  
first temperature acrylic based emulsion copolymer to the second copolymer is about 1 to  
1.5.

13. A composition of polymers as claimed in any one of claims 9 to 12 in which  
15 the weight ratio of the first acrylic based emulsion copolymer to the second acrylic based  
copolymer is in a range of about 3:1 to about 1:1.

14. A composition as claimed in any one of claims 9 to 13 in which the weight ratio  
of first acrylic based emulsion copolymer to the second acrylic based emulsion copolymer  
20 is about 1.2 to 1.

15. A composition as claimed in any one of the previous claims which comprises  
a first acrylic based emulsion copolymer which the reaction product of a first monomer  
system comprising styrene, butyl acrylate, methyl acrylate, methacrylic acid, acrylic acid and  
at least one copolymerizable silicone oligomer, said first emulsion copolymer having glass  
25 transition temperatures less than about 0°C and a second acrylic based emulsion copolymer  
which is the reaction product of a second monomer system sequentially polymerized in the  
presence of the first emulsion copolymer, said second monomer system comprised of styrene,  
butyl acrylate, methylacrylate, methacrylic acid, acrylic acid and at least one copolymerizable  
silicone oligomer, said second copolymer having a glass transition temperature of from about  
30 0°C to about 100°C, said sequentially polymerized mixture of first and second acrylic based  
emulsion copolymers being non-tacky and formed in the presence of at least two anionic  
surfactants.

16. An article having a coating deposited on a surface thereof from an aqueous  
suspension of at least one emulsion copolymer, said emulsion copolymer comprised of from  
35 about 0.7 to about 20% by weight of at least one copolymerizable low surface energy  
monomer, from about 30 to about 85% by weight of at least one alkyl acrylate containing  
from 1 to about 10 carbon atoms in the alkyl group, the balance of the monomers comprising  
hard monomers, said hard monomers, when homopolymerized having a glass transition

1 temperature greater than about 25°C and present in an amount sufficient to provide a non-tacky acrylic based emulsion copolymer.

17. An article having a coating deposited on a surface thereof from an aqueous suspension comprising an elastic, powder-free, non-tacky, emulsion acrylic copolymer  
5 comprising of from about 0.7 to about 20% by weight of at least one copolymerizable low surface energy monomer, which is a silicone oligomer from about 30 to about 85% by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the alkyl group, the balance of the monomers comprising hard monomers, said hard monomers, when homopolymerized having a glass transition temperature greater than about 25°C and present  
10 in an amount sufficient to provide the non-tacky acrylic based emulsion copolymer, said article being rubber.

18. An article formed by coagulation of rubber from a latex onto a mold and having on at least one surface thereof a powder-free, non-tacky adherent elastic polymeric coating comprised of an acrylic based emulsion copolymer formed by emulsion polymerization of a  
15 monomer system comprised of from about 0.7 to about 20% by weight total of at least one copolymerizable low surface energy monomer, which is a silicone oligomer, and from about 30 to about 85% by weight of at least one alkyl acrylate selected from the group consisting of methyl acrylate, ethyl acrylate, butyl acrylate and mixtures thereof, the balance of the monomers comprised of hard monomers which, when homopolymerized, have a glass  
20 transition temperature greater than 0°C and provided in an amount sufficient to form non-tacky emulsion copolymer, said emulsion copolymer being deposited from an aqueous suspension of the emulsion copolymer.

19. An article as claimed in any one of claims 16 to 18 in which the copolymerizable low surface energy monomer is present in an amount of from about 1 to  
25 15% by weight of the acrylic based copolymer.

20. An article as claimed in any one of claims 16 to 19 in which the alkyl acrylate is selected from the group consisting of methyl acrylate, butyl acrylate, and mixtures thereof.

21. An article as claimed in any one of claims 16 to 20 in which the hard monomer comprise monomers selected from the group consisting of styrenic monomers, alkyl  
30 methacrylates, unsaturated carboxylic acids containing from 3 to about 5 carbon atoms, amides and mixtures thereof.

22. An article as claimed in any one of claims 16 to 21 in the shape of a glove and formed by coagulation of rubber from a latex.

23. An article as claimed in any one of claims 16 to 22 in which the copolymer  
35 contains a composited particulate solid selected from the group consisting of calcium carbonate and starch and is deposited onto a formed article or a mold on which the article is formed.

24. An article as claimed in claim 22 or 3 in which the finished article is a rubber glove having an inner and outer surface, said inner surfaces having thereon a donning coating

1 of first acrylic based emulsion copolymer and said outer surface have thereon a mold release, coating of second acrylic based emulsion copolymer.

25. An article as claimed in claim 24 in which the first and second coatings are the same.

5 26. An article as claimed in claim 24 in which the first and second coating are different.

27. An article as claimed in any one of claims 16 to 26 in which a polymeric coating comprising an adherent acrylic based emulsion copolymer formed of monomers comprised of from about 0.7 to about 20% by weight of a copolymerizable silicone oligomer, from about 40 to about 80% by weight of at least one alkyl acrylate selected from the group consisting of methyl acrylate, butyl acrylate, and mixtures thereof, and at least one monomer selected from the group consisting of styrene, methacrylic acid, acrylic acid, methyl methacrylate, isobutoxymethacryl-amide, isobutylmethacrylate and mixtures thereof, said emulsion copolymer being deposited from an aqueous suspension of the emulsion copolymer.

15 28. An article as claimed in any one of claims 16 to 27 in which the coating comprises a first acrylic based emulsion copolymer and a second acrylic based emulsion copolymer, said first and second copolymers formed by emulsion polymerization of monomers comprised of from about 0.7 to about 20% by weight of at least one copolymerizable silicone oligomer, from about 30 to about 85% by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the alkyl group, the balance of the monomers comprising hard monomers, which when homopolymerized, have a glass transition temperature greater than 0°C and provided in an amount sufficient to form an admixture an acrylic based emulsion copolymer which is non-tacky, said first acrylic based emulsion copolymer having a major glass transition temperature peak of from about -50°C to about 25°C, said second acrylic based emulsion copolymer having a major glass transition temperature peak from about 25°C to about 100°C.

25 29. An article as claimed in claim 28 in which the weight ratio of the first acrylic based emulsion copolymer to the second acrylic based emulsion copolymer is in the range of about 1:1 to about 1:3.

30 30. An article as claimed in claim 28 or 29 in which the weight ratio of the first acrylic based emulsion copolymer to the second acrylic based copolymer is in a range of about 3:1 to about 1:1.

35 31. An article as claimed in any one of claims 28 to 30 in which the mixture comprises a first non-tacky acrylic based emulsion copolymer which is comprising the reaction product of a first monomer system comprising styrene, butyl acrylate, methyl acrylate, methacrylic acid, acrylic acid and at least one copolymerizable silicone oligomer, and a second acrylic based emulsion copolymer which is the reaction product of a second monomer system sequentially polymerized in the presence of the first emulsion copolymer,

1 said second monomer system comprised of styrene, butyl acrylate, methylacrylate, methacrylic acid, acrylic acid and at least one copolymerizable silicone oligomer, said sequentially polymerized mixture of first and second acrylic based emulsion copolymers being non-tacky and formed in the presence of at least two anionic surfactants.

5 32. A process for the production of rubber glove articles by coagulation of rubber from latex which comprises:

a) forming on a mold for the rubber gloved article to be formed a coating of a first acrylic based emulsion copolymer capable of releasing from the mold and containing a copolymerized amount of at least one copolymerizable low surface energy monomer deposited from a suspension and a coagulant salt present in a concentration sufficient to be capable of causing coagulation of rubber from the latex onto the first acrylic based copolymer;

10 b) immersing the mold having the coating of the first acrylic based emulsion copolymer and the coagulant salt into a latex containing the rubber for a time sufficient to cause coagulation of the rubber from latex onto the surface of the coating, to form a glove having a first acrylic based copolymer coated surface;

15 c) immersing the first acrylic based copolymer coated glove article into a second suspension of a donning acrylic based emulsion copolymer containing a copolymerized amount of at least one copolymerizable low surface energy monomer to coat the surface opposed to the first coated surface to provide a second coated surface of acrylic based copolymer on the rubber glove article; and

20 d) stripping a double coated rubber glove from the mold.

33. A process as claimed in claim 32 in which the mold is sufficiently textured to provide a dulled coating.

25 34. A process as claimed in claims 32 or 33 in which an inert insoluble particulate powder selected from the group consisting of calcium carbonate and corn starch is deposited with the donning acrylic based emulsion copolymer.

30 35. A process as claimed in any of claims 32 to 34 in which each non-tacky acrylic based emulsion copolymer is independently comprised of the reaction product of from about 0.7 to about 20% by weight of at least one copolymerizable low surface energy monomer, from about 30 to about 85% by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the alkyl group, the balance of the monomers comprising hard monomers, said hard monomers, when homopolymerized having a glass transition temperature greater than about 25°C, and present in an amount sufficient to form a non-tacky acrylic based emulsion copolymer.

35 36. A process as claimed in any one of claims 32 to 35 in which the copolymerizable low surface energy monomer is a copolymerizable silicone oligomer.

1           37. A process as claimed in any one of claims 32 to 36 in which the copolymerizable low surface energy monomer is present in an amount of from about 1 to about 15% by weight of the acrylic based copolymer.

5           38. A process as claimed in claims 35, 36 or 37 in which the alkyl acrylate is selected from the group consisting of methyl acrylate, butyl acrylate, and mixtures thereof.

          39. A composition as claimed in any one of claims 35 to 38 in which the hard monomer comprise monomers selected from the group consisting of styrenic monomers, alkyl methacrylates, unsaturated carboxylic acids containing from 3 to about 5 carbon atoms and mixtures thereof.

10          40. A process as claimed in any one of claims 32 to 39 in which the acrylic based emulsion copolymer is comprised of from about 0.7 to about 20% by weight of at least one copolymerizable silicone oligomer, from about 40 to about 80% by weight of an alkyl acrylate selected from the group consisting of methyl acrylate, butyl acrylate, and mixtures thereof, the balance of the monomers selected from the group consisting of styrene,  
15          methacrylic acid, acrylic acid, methyl methacrylate, isobutoxymethacryl-amide, isobutylmethacrylate, and mixtures thereof.

          41. A process as claimed in any one of claims 32 to 40 and in which the suspension contains at least two anionic surfactants selected from the group consisting of the sodium dioctyl sulfosuccinate, the ammonium salt of sulfonated nonylphenoxypoly (ethyleneoxy)  
20          ethanol and a fatty alcohol polyglycol ether sulfate.

          42. A process as claimed in any one of claims 32 to 41 in which each acrylic based emulsion copolymers is in dependently comprised of a mixture of a first acrylic based emulsion copolymer and a second acrylic based emulsion copolymer, said first and second copolymers formed by emulsion polymerization of monomers comprised of from about 0.7  
25          to about 20% by weight of at least one copolymerizable low surface energy monomer, from about 30 to about 85% by weight of at least one alkyl acrylate containing from 1 to about 10 carbon atoms in the alkyl group, the balance of the monomers comprising hard monomers, which when homopolymerized, have a glass transition temperature greater than 25°C and provided in an amount sufficient to form a mixture of first and second acrylic  
30          based emulsion copolymers which are non-tacky, said first acrylic based emulsion copolymer having a glass transition temperature from about -50°C to about 25°C, said second acrylic based emulsion copolymer having a glass transition temperature from about 25°C to about 100°C.

          43. A process as claimed in claim 42 in which the weight ratio of the first acrylic based emulsion copolymer to the second acrylic based emulsion copolymer is in the range  
35          of about 1:1 to about 1:3.

          44. A process as claimed in claims 42 or 43 in which the weight ratio of the first temperature acrylic based emulsion copolymer to the second copolymer is about 1 to 1.5.

1           45. A process as claimed in any one of claims 42 to 44 in which the weight ratio of the first acrylic based emulsion copolymer to the second acrylic based copolymer is in a range of about 3:1 to about 1:1.

5           46. A process as claimed in any one of claims 42 to 45 in which the weight ratio of first acrylic based emulsion copolymer to the second acrylic based emulsion copolymer is about 1.2 to 1.

10           47. A process as claimed in any one of claims 42 to 46 in which the first acrylic based emulsion copolymer is comprised of the reaction product of a first monomer system comprising styrene, butyl acrylate, methyl acrylate, methacrylic acid, acrylic acid and at least one copolymerizable silicone oligomer, said first emulsion copolymer having glass transition temperatures less than about 0°C and the second acrylic based emulsion copolymer which is the reaction product of a second monomer system sequentially polymerized in the presence of the first emulsion copolymer, said second monomer system comprised of styrene, butyl acrylate, methylacrylate, methacrylic acid, acrylic acid and at least one copolymerizable silicone oligomer, said second copolymer having a glass transition temperature of from about 0°C to about 100°C, said sequentially polymerized mixture of first and second acrylic based emulsion copolymers being non-tacky and formed in the presence of at least two anionic surfactants.

15

20

25

30

35



FIG. 1

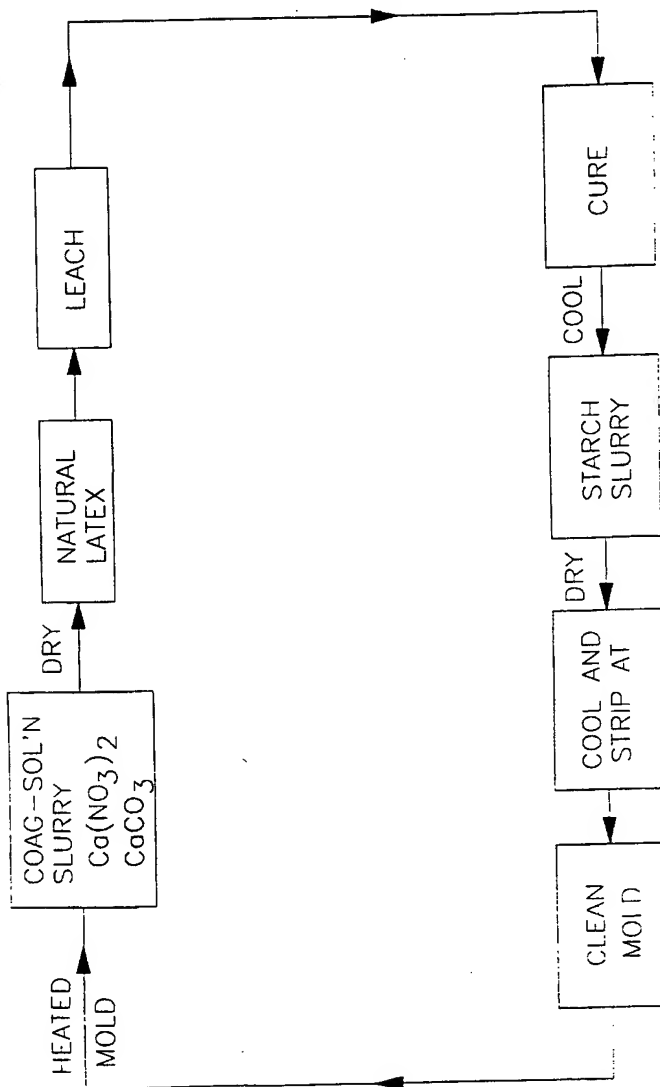


FIG. 2


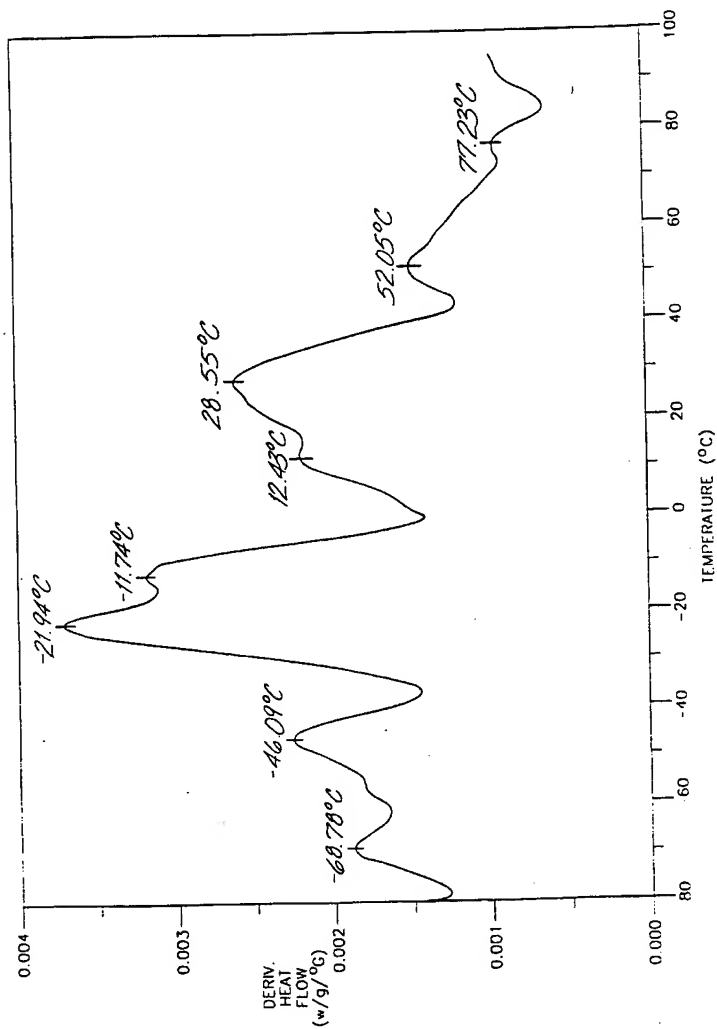


FIG. 3

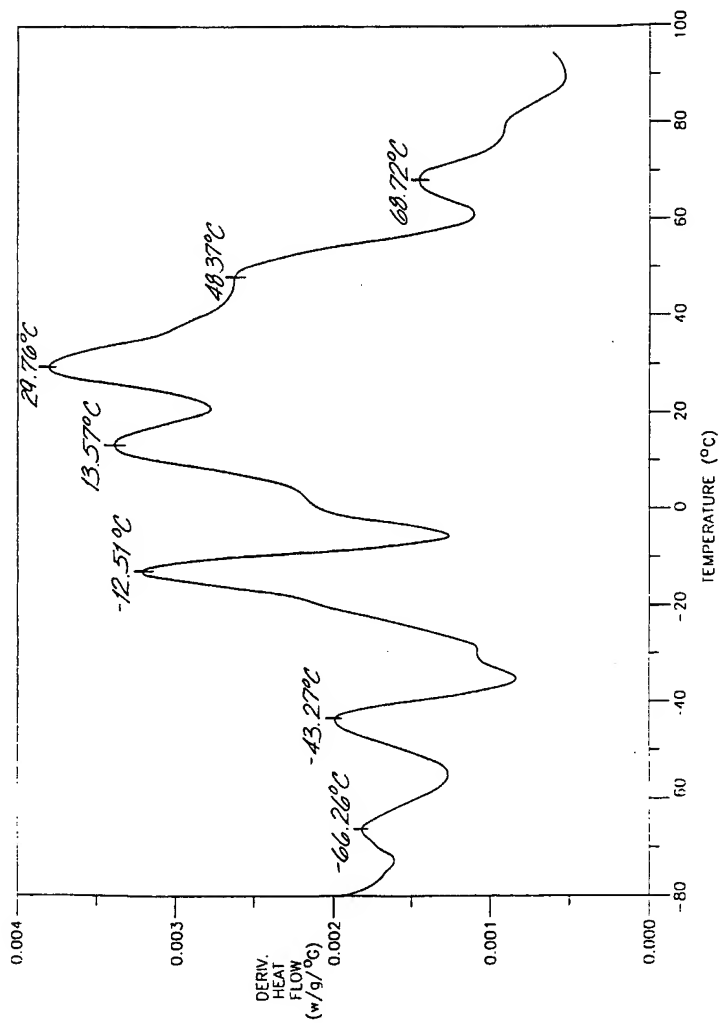

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/01866

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : B29C 39/00; C08L 41/00, 43/00

US CL : 264/300; 524/547

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 264/300; 524/547

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ----- Y	US, A, 5,214,095 (LAVOIE) 25 May 1993, see column 4, line 39 to column to column 6, line 47.	1-3, 16-17, 19 ----- 18
A	US, A, 5,084,514 (SZCZUCHURA ET AL) 26 January 1992, see column 3, line 47 to column 4, line 17.	32-34

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\*

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principles or theory underlying the invention

\*X\*

document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\*

document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*A\*

document member of the same patent family

Date of the actual completion of the international search

26 MAY 1996

Date of mailing of the international search report

JUN 3 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

FREDERICK KRASS

Telephone No. (703) 308-2351

Form PCT/ISA/210 (second sheet)(July 1992)\*

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/01866

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 4-15, 20-31, 35-47  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.